
SEC 3 SEC 2 S 89°49'20" W 5303.88' S 89°49'20" W 2651.94' SEC 4 SEC 3 SEC 10 **SEC** 11 N 89°49'19" E 2651.96' FOUND COUNTY ALUM ROD AND CAP BENT OVER IN SET COUNTY 2½" DIA ALUM. CAP ON 5/8"X24" REBAR AT SECTION CORNER USING TIES FROM PREVIOUS SURVEYS SEC 9 SEC 10 FOUND MONUMENT SPIKE IN BRASS
WASHER AT SECTION CORNER—RESET
WITH A COUNTY 2½" DIA. ALUM CAP
ON REBAR FLUSH WITH ASPHALT MONUMENT BOX AT QUARTER
CORNER——RESET NEW
COUNTY 2½" ALUM CAP S 89°47'08" W 2663.06' FOUND COUNTY 2½" DIA. CAP AND PIPE MONUMENT FOUND COUNTY 2½" DIA.
CAP AND PIPE MONUMENT AT QUARTER CORNER AT QUARTER CORNER CONTROL POINT "PV BASE" REBAR IN STONE MOUND FOUND COUNTY 2½" DIA. CAP AND PIPE MONUMENT AT SECTION CORNER SEC 10 SEC 11 SET 4' LATH ALONG SECTION LINE 600.00 SEC 15 | SEC 14 N 89°55'24" W 2654.49' S 89°38'06" W 2655.11' FOUND COUNTY 2½" DIA. CAP AND PIPE MONUMENT SEC 16 SEC 15 FOUND COUNTY 2½" DIA. CAP AND PIPE MONUMENT AT QUARTER CORNER AT SECTION CORNER

RECORD OF SURVEY FOR SCOTT HARVEY

SECTION 10, TOWNSHIP 4 SOUTH, RANGE 2 WEST UINTAH SPECIAL BASE AND MERIDIAN

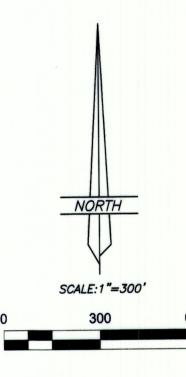

LEGEND AND NOTES

- FOUND SECTION CORNERS AS NOTED ON PLAT
- FOUND QUARTER CORNERS AS NOTED ON PLAT
- FOUND OR SET SIXTEENTH CORNERS AS NOTED ON PLAT
- △ SET MONUMENT SPIKE W/WISKERS ON LINE AT HIGHWAY RIGHT-OF-WAY FENCE
- SET 5/8"X24" REBAR WITH CAP STAMPED ALLRED SURVEYING AT CORNERS
- O SET MAG NAIL AND BRASS WASHER IN ASPHALT OF COUNTY ROAD ---- EXISTING FENCE
- LATH SET AS POINTS ON LINE

THIS SURVEY WAS PERFORMED USING GLOBAL POSITIONING SYSTEM (G.P.S.) EQUIPMENT AND PROCEDURES USING THE UTAH G.P.S. VIRTUAL REFERENCE STATION CONTROL NETWORK MAINTAINED AND OPERATED BY THE AUTOMATED GEOGRAPHIC REFERENCE CENTER. THE BASIS OF BEARINGS IS GEODETIC NORTH DERIVED FROM G.P.S. OBSERVATIONS AT A CONTROL POINT LOCATED AT LAT: 40°08'46.53928" N & LONG: 110°05'31.20770" W USING SAID CONTROL NETWORK.

THIS SURVEY WAS PERFORMED AT THE REQUEST OF SCOTT HARVEY FOR THE PURPOSE OF MARKING THE PROPERTY LINES SHOWN ON THIS PLAT. THIS TOWNSHIP WAS ORIGINALLY SURVEYED BY THE GENERAL LAND OFFICE IN 1883 USING THE "3-MILE" METHOD OF SECTION SUBDIVISION, DURING WHICH TIME THE SIXTEENTH CORNERS WERE SET. THE TOWNSHIP WAS RESURVEYED BY THE G.L.O. IN 1904 USING THE STANDARD STATUTORY METHOD, NOT THE PREVIOUS "3-MILE" METHOD WHEN IT WAS STILL ALL FEDERAL LAND. NO PATENTS HAD BEEN ISSUED BEFORE THE 1904 RESURVEY. ALL THE LAND WAS THEN CONVEYED OVER TIME USING THE LATER SURVEY. THEREFORE, THE STANDARD METHOD WAS USED BY THIS CURRENT SURVEY FOR THE DETERMINATION OF THE ALIQUOT PART CORNERS. A SEARCH WAS MADE FOR THE MONUMENTS MARKING THE SEVERAL CORNERS NEEDED FOR THIS SURVEY AND THE RESULTS ARE NOTED ON THE PLAT. THIS PLAT REPRESENTS A DEPENDANT RESURVEY OF PORTIONS OF SECTION 10 AND IS DESIGNED TO RESTORE THE ALIQUOT PART CORNERS TO THEIR TRUE ORIGINAL LOCATIONS ACCORDING TO THE BEST AVAILABLE EVIDENCE. THE CORNERS FOUND OR REESTABLISHED WERE USED TO CONTROL THE SURVEY.

SURVEYOR'S CERTIFICATE

I, JERRY D. ALLRED, DUCHESNE COUNTY, UTAH, DO HEREBY CERTIFY THAT I AM A PROFESSIONAL LAND SURVEYOR AND THAT I HOLD CERTIFICATE NUMBER 148951 AS PRESCRIBED BY THE STATE OF UTAH. I FURTHER CERTIFY THAT THIS PLAT WAS PREPARED FROM THE FIELD NOTES AND ELECTRONIC DATA COLLECTOR FILES OF AN ACTUAL SURVEY MADE BY ME OR UNDER MY PERSONAL SUPERVISION, AND THAT THE MONUMENTS INDICATED WERE FOUND OR SET DURING SAID SURVEY, AND THAT THIS PLAT ACCURATELY REPRESENTS SAID SURVEY TO THE BEST OF MY KNOWLEDGE AND BELIEF.



Jerry D. Allred, Professional Land Surveyor, Certificate No. 148951 (Utah)

COUNTY SURVEYOR'S FILE # 3747 JERRY D. ALLRED & ASSOCIATES, INC. SURVEYING CONSULTANTS 1235 NORTH 700 EAST——P.O. BOX 975 DUCHESNE, UTAH 84021 (435) 738—5352

21 MAY 2018 18-100-035